


Telephone Cable 10P / 25P Telephone Cable PVC

Forteq Cable

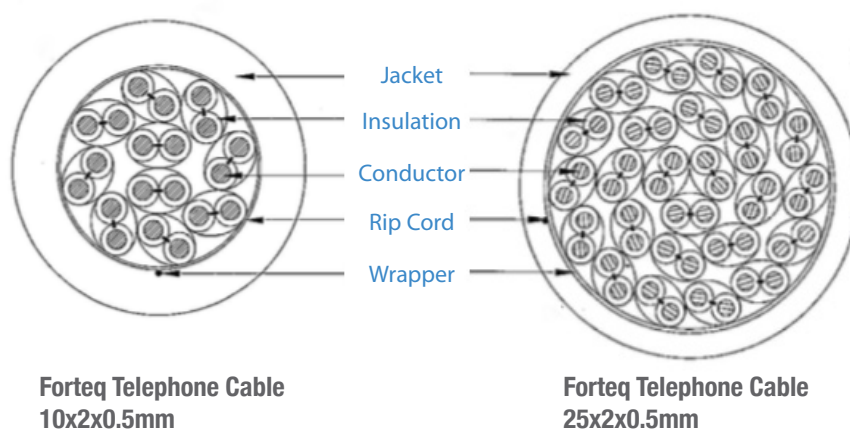

Cable Parameter

	10P	25P
Specification	(1/0.500 x 10P) + MY + RIPCORDER BARE	(1/0.500 x 25P) + MY + RIPCORDER BARE
Description	FORTEQ Telephone Cable 10x2x0.5mm	FORTEQ Telephone Cable 25x2x0.5mm
1. Inner Conductor		
Material	Bare Annealed Copper	Bare Annealed Copper
Diameter	0.500 mm	0.500 mm
Combination	1	1
Stranded Diameter	0.50 mm (Reference)	0.50 mm (Reference)
Cross Section Area	0.1963 mm ² (Approximately)	0.1963 mm ² (Approximately)
2. Insulation		
Material	High Density Polyethylene	High Density Polyethylene
Diameter	0.90 ± 0.05 mm	0.90 ± 0.05 mm
Nominal Thickness	0.20 mm	0.20 mm
Colour	Refer Table A	Refer Table A
3. Wrapper		
Material	Mylar	Mylar
4. Splitter		
Material	Rip Cord	Rip Cord
5. Jacket		
Material	Polyvinyl Chloride	Polyvinyl Chloride
Diameter	7.60 ± 0.30 mm	10.50 ± 0.40 mm
Nominal Thickness	0.80 mm	0.80 mm
Colour	GRY 1405 UNI	GRY 1405 UNI
6. Marking		
Wording	Forte Telephone Cable 10x2x0.5mm PVC WWWW XXXM	Forte Telephone Cable 25x2x0.5mm PVC WWWW XXXM
Colour	Black	Black

Table A

	10P	25P
No.	Insulation Colour	Insulation Colour
1	Blue X White	Blue X White
2	Orange X White	Orange X White
3	Green X White	Green X White
4	Brown X White	Brown X White
5	Grey X White	Grey X White
6	Blue X Red	Blue X Red
7	Orange X Red	Orange X Red
8	Green X Red	Green X Red
9	Brown X Red	Brown X Red
10	Grey X Red	Grey X Red
11		Blue X Black
12		Orange X Black
13		Green X Black
14		Brown X Black
15		Grey X Black
16		Blue X Yellow
17		Orange X Yellow
18		Green X Yellow
19		Brown X Yellow
20		Grey X Yellow
21		Blue X Violet
22		Orange X Violet
23		Green X Violet
24		Brown X Violet
25		Grey X Violet